



# Underbench Storage Refrigerators with Solid Door

## Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



## USC260H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 314 L

**Exterior dimensions in mm:** 1360w x 700d x 830h

**Number of adjustable shelves:** 2



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 119/102 kg

**Energy consumption in 24h:** 2.2 kWh

**\$3,800.00+GST**

## USC400H



Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 465 L

**Exterior dimensions in mm:** 1795w x 700d x 830h

**Number of adjustable shelves:** 3



**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 140/121 kg

**Energy consumption in 24h:** 3.1 kWh

**\$4,400.00+GST**

## USC550H

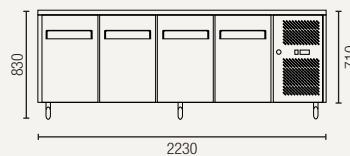

Allow min. 100mm clearance for installation, all vents must be left clear

**Gross volume:** 616 L

**Exterior dimensions in mm:** 2230w x 700d x 830h

**Number of adjustable shelves:** 4

**Temperature set range:** -2°C to +8°C

**Gross/net weight:** 170/150 kg

**Energy consumption in 24h:** 4.7 kWh

**\$5,200.00+GST**